

LEDincand Soft DA60 KP20T4



Features

- Soft filament
- Similar design to traditional bulb
- Perfect decoration
- Dimmable design with switch driver
- Long span life up to 25,000 hours

Applications

- Decorative luminaries
- Perfect design solution for crystal chandelier application
- Hotels, restaurants, bars

Product Overview

Part No.	LEDincand Soft DA60 KP20T4
Wattage (W)	4
Incandescent Equivalent (W)	20
Dimmable	Yes
Socket	E27
Lumens (lm) by 90°	180
Luminous intensity(cd)	N/A
Energy efficiency class	A+
PF	>0.7
CCT (K)	2200
CRI (Ra)	80
Voltage (V)	AC220-240V
Current (mA)	20
Frequency(Hz)	50
Beam Angle (deg)	360
Lifespan(hrs)	100000 Switching Cycles
Working Temperature (°C)	-20 - 40
Storage Temperature (°C)	-20 - 60
EAN Code	40 6057411043

LEDincand Soft DA60 KP20T4

Physical data


Weight (g)	32
Lamp Length (mm) - C/L	104
Max. Lamp Diameter (mm) - D	60
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	Box
Single package dimensions (L x W x H) (mm)	60 X 105 / 1PCS
Inner package dimensions (L x W x H) (mm)	N/A
Outer package dimensions (L x W x H) (mm)	464*375*286/ 60PCS

* Not recommend to use in fully sealed fixture

* Power off when replacement

* Do not touch when lighting

Technical Drawings

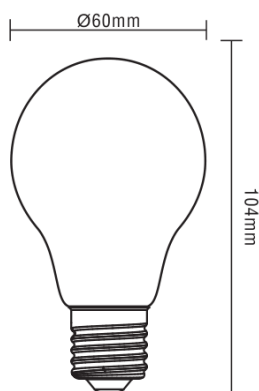

Energy Label

