

Artemi Flex Strip Data Sheet

Single CCT Series (15W 24V 2700K/3000/4000K/6000K 8mm)

*Features

- Exact colour selection in 2700K~ 6000K on black body line, high CRI 90
- High power 15W/m, high brightness 1200lm/m@4000K for general lighting
- High efficiency 80lm/W@4000K
- Comfortable and uniform light with no lighting dot by 3D SMD LED
- Brightness difference is less than 15% from end to end for 5m length
- 24V, high power efficiency
- Wide beam angle 180°
- Easy to cut
- 3M adhesive back tape
- Good dissipation, 25000hrs lifespan, 40000hrs long lifespan with heatsink



Technical data


| Electrical specifications | | | |
|---|------------------------|---|---------------|
| Part No.: @2700K | CTASWC115C08F5-76064 | EAN | 4060574760645 |
| Part No.: @3000K | CTASWC115C08F5-76065 | EAN | 4060574760652 |
| Part No.: @4000K | CTASWC115C08F5-76066 | EAN | 4060574760669 |
| Part No.: @6000K | CTASWC115C08F5-76068 | EAN | 4060574760683 |
| Wattage (W/m) | 15 | AC input voltage (V) | - |
| DC output voltage (V) | 24 | Power factor | - |
| Frequency (Hz) | - | Total harmonic distortion (THD) | - |
| Dimmable | Yes | Flicker-free | - |
| Max. no. of lamps on B16A circuit breaker | - | Max. no. of lamps on C10A circuit breaker | - |
| Max. no. of lamps on C16A circuit breaker | - | | |
| Photometric specifications | | | |
| Colour temperature (CCT) | 2700-6000K | CRI (Ra) | 90 |
| | 73 @2700K | | 1132 @2700K |
| | 73 @3000K | | 1132 @3000K |
| Luminous efficiency (lm/W) | 80 @4000K | Luminous flux (lm/m) | 1266 @4000K |
| | 73 @6000K | | 1154 @6000K |
| | | | |
| Standard deviation of colour | ≤3SDCM | Beam angle (°) | 180° |
| UGR | - | LED Qty (pcs/m) | 132 |
| Mechanical specifications | | | |
| Housing material | FPC | Housing Colour | White |
| Optical cover/ lens material | - | Length/ diameter (mm) | 5000 |
| Width/ diameter (mm) | 8 | Height (mm) | 1.45 |
| Cut length (mm) | 25 | Product weight | 60g |
| Lifespan | | | |
| Number of switching cycles | 100000 | L70/B50 service life at 25°C | 40,000 hrs |
| L80/B10 service life at 25°C | 25,000 hrs | L90/B10 service life at 25°C | 20,000 hrs |
| Warranty period | 5 Years with heat-sink | | |

| Application parameters | |
|-----------------------------------|------------------|
| Working temperature range | -20~+60°C |
| Additional product specifications | |
| Type of installation | 3M adhesive tape |
| Connection type | Connector |


| | |
|---------------------------|-----------|
| Storage temperature range | -20~+70°C |
| Location of installation | - |
| Protection type | IP20 |

- Power off before replacement
- Do not be in violation of any fire regulations when using
- Consult qualified electricians for technical support
- If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard


Dimensions: Cut dimension: 25mm

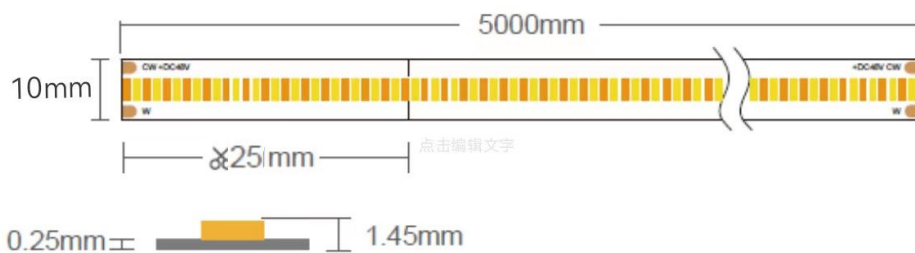


* Photometric Information (0.5m)

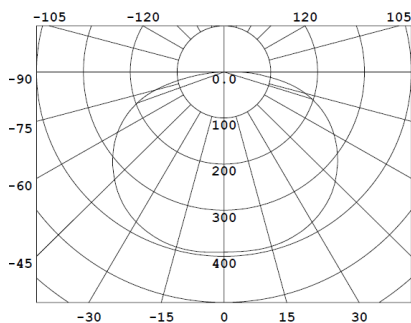

X axial

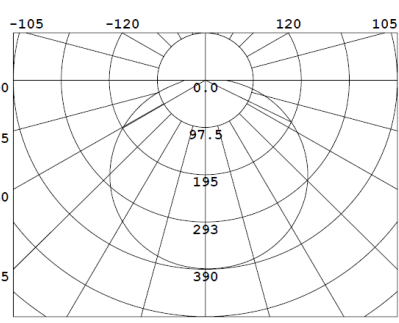

Y axial

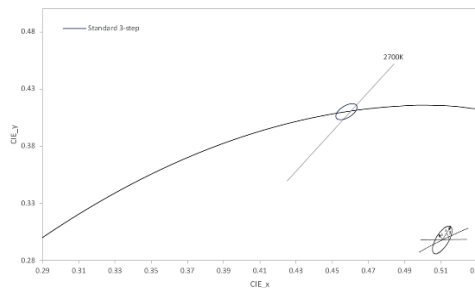

CIE Color Space

* Energy Label




CIVILIGHT

LED Strips



*Product & Wiring Connection & Cautions

Product connections

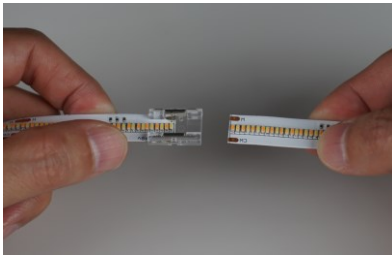

Insert each ends of led strips into the end of the connection terminal respectively, make sure the metal clip is on the same side as the metal solder pad of led strip.




After complete the insert, also make sure both ends of led strip are tightly connected.



Press the metal clip down with the appropriate plier to ensure that the metal clip is inserted into the appropriate position ,and connection completed.

Wiring connections

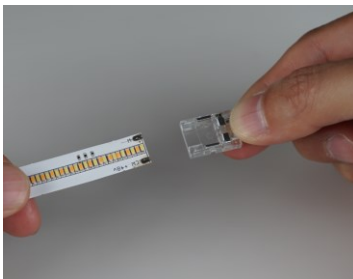


Insert one end of led strip and wire connector into both ends of the connection terminal respectively to ensure that the metal clip is on the same side as the metal solder pad of led strip.




Meanwhile make sure both ends are closely connected, Press the metal clip down with the appropriate plier to ensure that the metal clip is inserted into the appropriate position ,and connection completed.

Cautions

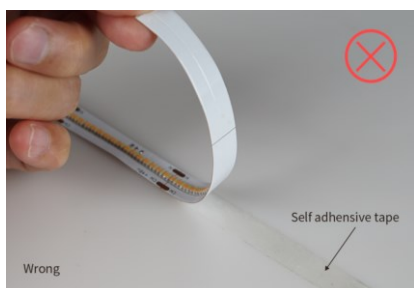


If the led strip needs to be torn up,please make sure that the self adhesive tape is torn with the led strip,otherwise the led strip will be damaged.


When install the led strip, please note the installation technique
The led strip can be bent, but not distorted, as shown below

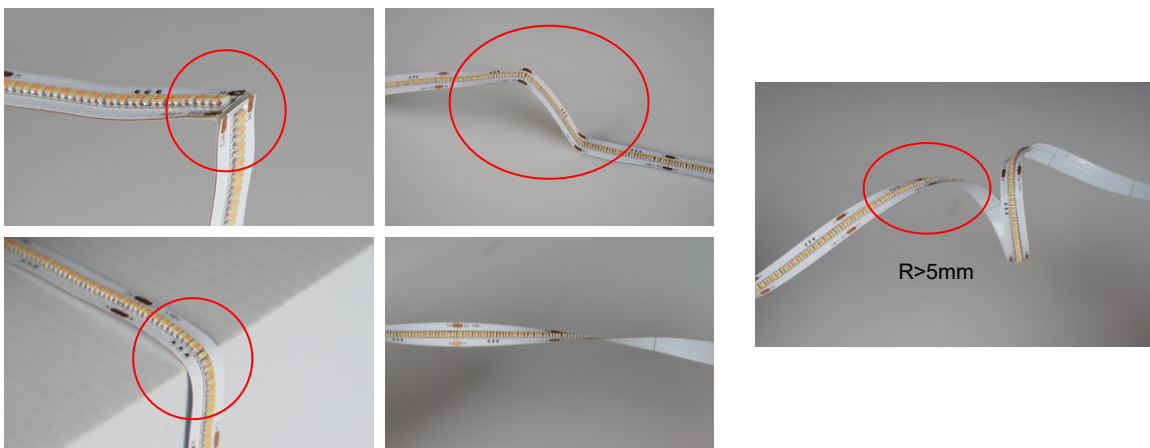

Distortion (Wrong)

Bend (Right)


 LED strips are low voltage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC 110v or AC 220v, otherwise it will burn out the LED strips.

 Clean up the installation surface and it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.


Wiring Diagram




*Installation Step

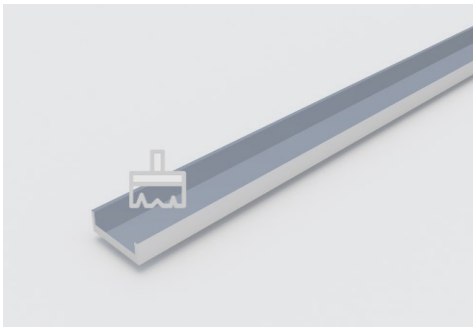


1. Clean

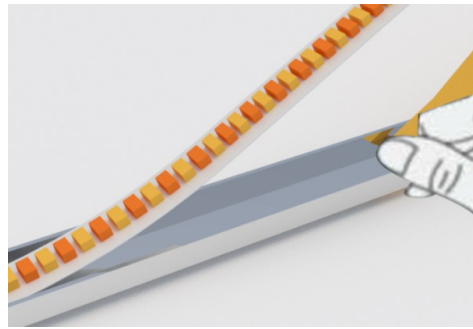

2. Peel off the adhesive tape and stick the strip

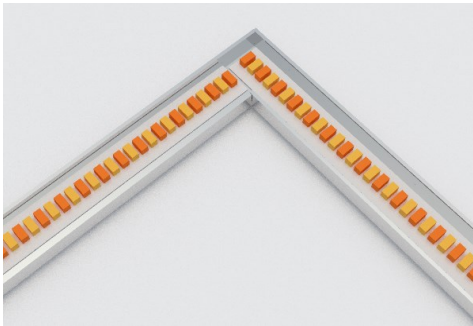

3. Vertical installation

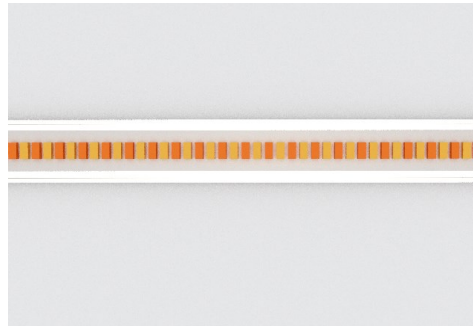

4. Done

*Accessories / Parts (Optional):



*Semi-transparent
Plastic Cover



*Connector Clamp



*Aluminum slot Clamp



*Aluminum slot



*Square plastic Cover