

# Artemi Flex Strip Data Sheet

Single CCT Series ( 8W 24V 1950K & 2600K 5mm)

## \*Features

- Exact colour selection in 1950K & 2600K on black body line, high CRI 90
- 8W/m, high brightness 150lm/m@2600K for general lighting
- Efficiency 75lm/W@2600K
- Comfortable and uniform light with no lighting dot by 3D SMD LED
- Brightness difference is less than 15% from end to end for 5m length
- 24V, comfortable light
- Wide beam angle 180°
- Easy to cut
- 3M adhesive back tape
- Good dissipation, 25000hrs lifespan, 40000hrs long lifespan with heatsink



## Technical data


Electrical specifications			
Part No.: @1950K	CTAS2C108C05F5-76062	EAN	4060574760621
Part No.: @2600K	CTASWC108C05F5-76063	EAN	4060574766638
Wattage (W/m)	2	AC input voltage (V)	-
DC output voltage (V)	24	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications			
Colour temperature (CCT)	1950~2600K	CRI (Ra)	90
Luminous efficiency (lm/W)	63 @1900K 75 @2600K	Luminous flux (lm/m)	480 @2100K 590
Standard deviation of colour	≤3SDCM	Beam angle (°)	180°
UGR	-	LED Qty (pcs/m)	240
Mechanical specifications			
Housing material	FPC	Housing Colour	White
Optical cover/ lens material	-	Length/ diameter (mm)	5000
Width/ diameter (mm)	8	Height (mm)	1.45
Cut length (mm)	25	Product weight	60g
Lifespan			
Number of switching cycles	100000	L70/B50 service life at 25°C	40,000 hrs
L80/B10 service life at 25°C	25,000 hrs	L90/B10 service life at 25°C	20,000 hrs
Warranty period	5 Years with heat-sink		

Application parameters	
Working temperature range	-20~+60°C
Additional product specifications	
Type of installation	3M adhesive tape
Connection type	Connector


- Power off before replacement
- Do not be in violation of any fire regulations when using
- Consult qualified electricians for technical support
- If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard

Storage temperature range	-20~+70°C
Location of installation	-
Protection type	IP20


## Dimensions: **Cut dimension: 25mm**

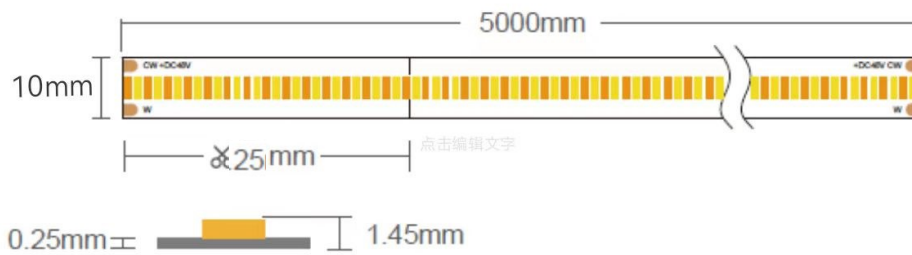


## \* Photometric Information (0.5m)

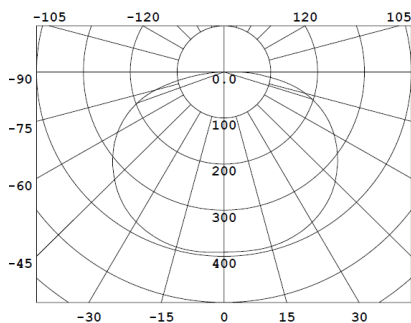

X axial

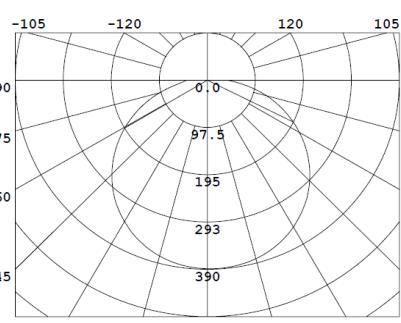

Y axial

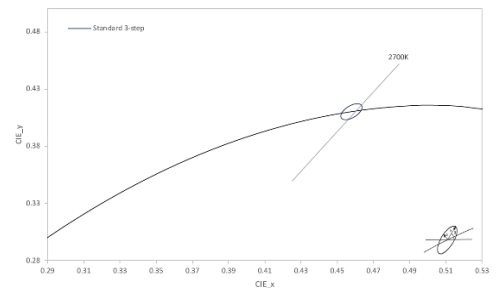

CIE Color Space

## \* Energy Label




CIVILIGHT

LED Strips




## \*Product & Wiring Connection & Cautions


### Product connections

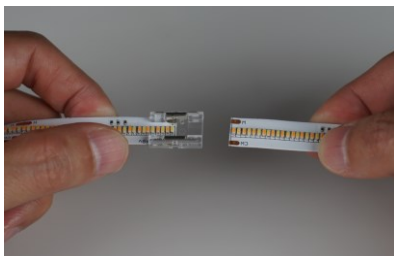

Insert each ends of led strips into the end of the connection terminal respectively, make sure the metal clip is on the same side as the metal solder pad of led strip.




After complete the insert, also make sure both ends of led strip are tightly connected.

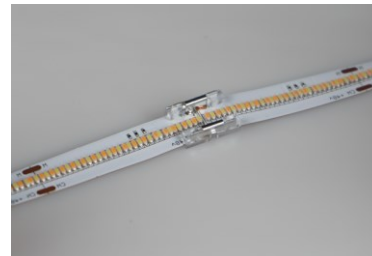

Press the metal clip down with the appropriate plier to ensure that the metal clip is inserted into the appropriate position ,and connection completed.

### Wiring connections

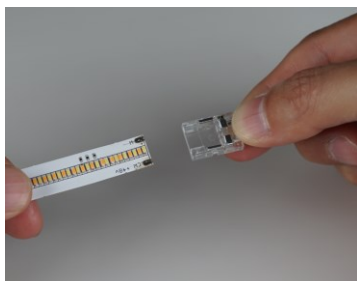


Insert one end of led strip and wire connector into both ends of the connection terminal respectively to ensure that the metal clip is on the same side as the metal solder pad of led strip.




Meanwhile make sure both ends are closely connected, Press the metal clip down with the appropriate plier to ensure that the metal clip is inserted into the appropriate position ,and connection completed.

### Cautions

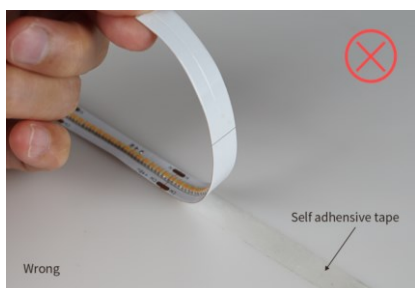


If the led strip needs to be torn up,please make sure that the self adhesive tape is torn with the led strip,otherwise the led strip will be damaged.


When install the led strip, please note the installation technique  
The led strip can be bent, but not distorted, as shown below

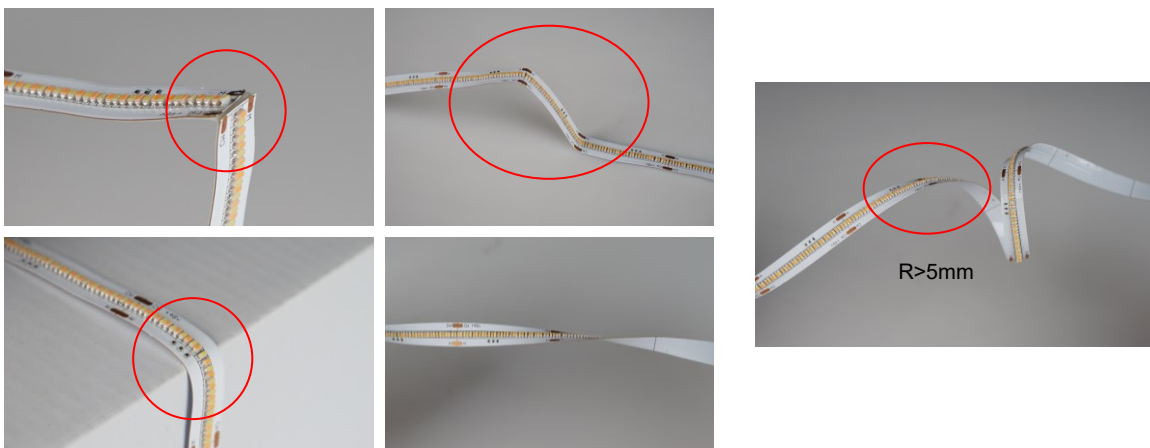

Distortion (Wrong)

Bend (Right)


 LED strips are low voltage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC 110v or AC 220v, otherwise it will burn out the LED strips.

 Clean up the installation surface and it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.


### Wiring Diagram




## \*Installation Step

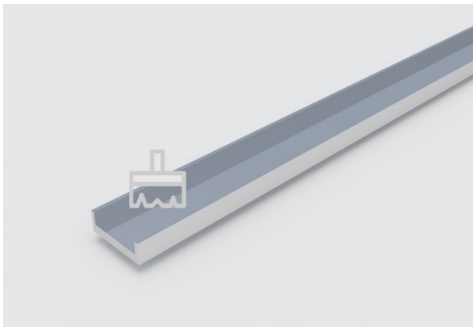


1. Clean

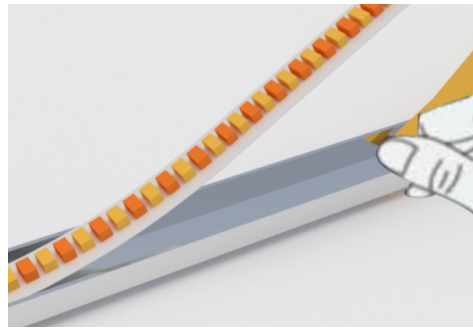

2. Peel off the adhesive tape and stick the strip

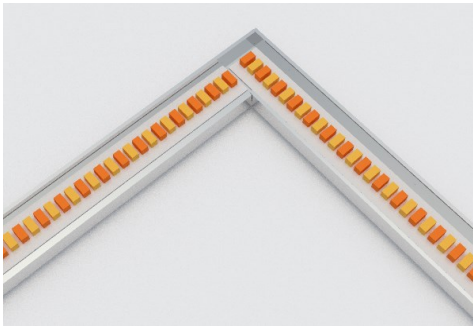

3. Vertical installation

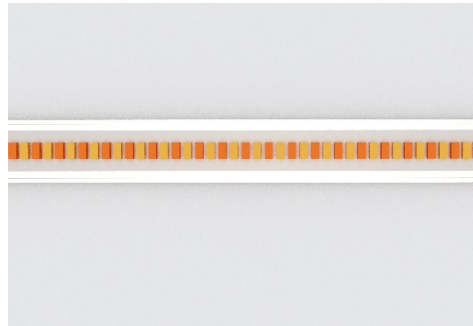

4. Done

## \*Accessories / Parts (Optional):



\*Semi-transparent  
Plastic Cover



\*Connector Clamp



\*Aluminum slot Clamp



\*Aluminum slot



\*Square plastic Cover