

Features

- The best LED Lamps to replace Halogen lamps
- HALELED optical design with patent, comfortable light like halogen
- 4.8W only, equal to 75W halogen lamp(Follow new ErP)
- High PF, Flicker free, Low UGR, CRI90
- Directional lighting source
- Replace traditional halogen lamps directly and easily
- Glass body, classic design
- Used for all kinds of non-enclosed lighting fixtures
- Lifespan 25000 hrs, 3 years warranty



CE RoHS ErP

Applications:


- Commercial Lighting: Hotels, Restaurants, Theater, Bars, Cafes, Shop Etc., Museum.
- Home Lighting: Villa, Residential buildings, house.
- All non-enclosed Directional lighting fixtures.

Technical data

Part No.	GU10 KC75T5-28357
Wattage (W)	4.8W
Voltage (V)	AC200V-240V
Frequency (Hz)	50/60Hz
Power factor	>0.58
Dimmable	Non-Dimmable
Color temperature (CCT)	3000K
Lumens(lm)	500
CRI	90
Beam angle (°)	36°
Luminous intensity(cd)	1200cd
Life Span(hrs)	25000hrs
Working temperatuer range	-20~+50℃
Storage temperature range	-20~+70℃
Gift Box Dimensions (LxWxH)	50*50*65mm
Inner Carton Dimensions (LxWxH)	270*110*80mm (10PCS)
Shipping Carton Dimensions(LxWxH)	580*285*185mm (100PCS)


Classic HALEd 97 GU10 4.8W 500lm Non-dimmable CRI90 36° 3000K GU10KC75T5-28357

Beam Angle(deg) & Illuminance (cd & lx) Diagram

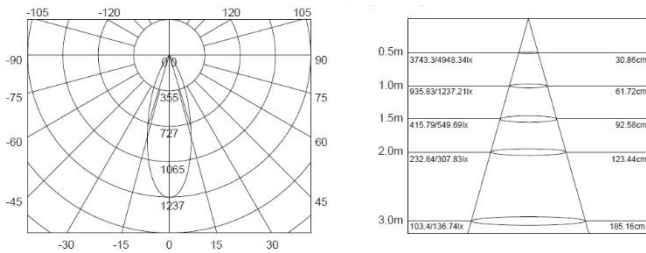

4.8W 500lm 3000K 36° / 1200cd

Technical Drawings (mm)



Package



Gift Box 50*50*65mm



Inner Carton 270*110*80mm(10PCS)




Shipping Carton 580*285*185mm(100PCS)

Installation /Mounting:

Please read the entire instruction manual before using the product and reserve it for future reference. We reserve the right for any error in text or image and any necessary change made to technical data. If you have any question regarding technical problems, please contact our Customer Services.

Replacement

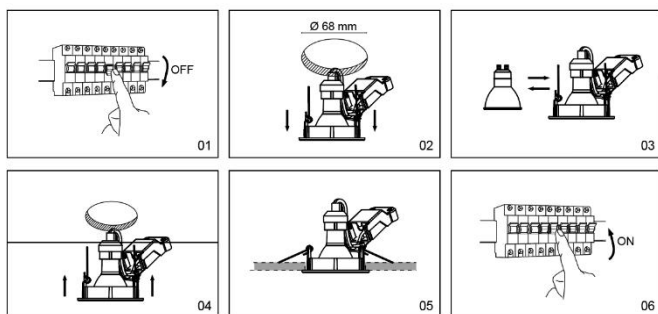

Cautions:

- Don't touch the lamp when it is lighted
- Don't use it in enclosed fixtures
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.