

*Feature:

- HALED patent optics design, similar to halogen light effect
- Easy and quick installation
- PF > 0.9, flicker free, follows new ErP
- Dimmable or dim to warm halogen function by triac dimmer
- CRI 95, R9 > 70
- Low UGR
- Peak luminous intensity 1750cd (24°) / 1350cd (36°)
- Metal appearance, excellent heat dissipation
- Lifespan 40000 hrs, 5 years warranty
- High energy efficiency




CE RoHS ErP



Technical data

Part No.	Type of installation		
CTCA3409DWW/ N/ B	Recessed		
Electrical specifications			
Wattage (W)	9W	Power factor	0.9
AC input voltage (V)	AC200V-240V	Current	43mA
Frequency (Hz)	50/60Hz	DC output voltage (V)	
Flicker metric PST	0.023	Stroboscopic effect metric SVN	0.25
Total harmonic distortion (THD)	24%	Dimmable	Yes
Max. no. of lamps on B16A circuit breaker	280	Max. no. of lamps on C10A circuit breaker	180
Max. no. of lamps on C16A circuit breaker	280		
Photometric specifications			
Color temperature (CCT)	3000K	CRI/ R9	95/ >70(Min.)
Chromaticity coordinate (x/ y)	0.459/ 0.412	Standard deviation of colour	≤ 3 SDCM
Useful luminous flux (lm)	550lm ± 5%	Luminous efficiency (lm/W)	61lm/ W
UGR	≤19		

Photometric Information

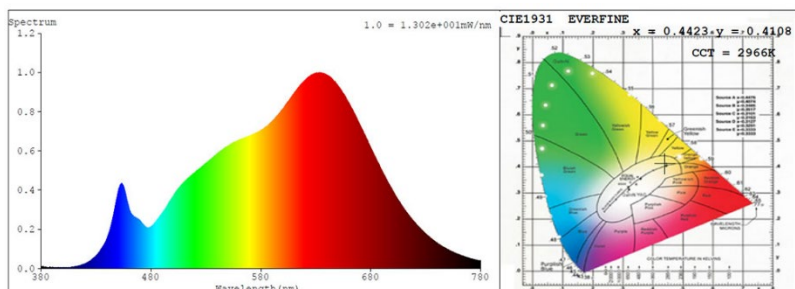

EAN	Colour	Beam angle	Peak Luminous intensity		
41100	Matt White	24°	1750cd		
41104	Stain Nickel	24°	1750cd		
41213	Matt Black	24°	1750cd		
41120	Matt White	36°	1350cd		
41125	Stain Nickel	36°	1350cd		
41208	Matt Black	36°	1350cd		

Mechanical specifications

Housing material	Aluminium
Optical cover/ lens material	AlReflector+PC+Glass
Height	55mm
Product weight	200g

Lifespan

Number of switching cycles	100,000-
L80/B10 service life at 25°C	40,000 hrs
Warranty	5 Years

Application parameters

Working temperatuer range	-20~+50°C
---------------------------	-----------

Package

Individual package length	105mm
Individual package height	68mm
Individual package width	105mm
Gross weight (single item)	220g
Driver	Internal

Housing Colour

Matt White / Stain Nickel / Matt Black

Length/ diameter 85mm

Hole size 68mm

L70/B50 service life at 25°C

50,000 hrs

L90/B10 service life at 25°C

20,000 hrs

Storage temperature range

-20~+70°C

Shipping box height

550mm


Shipping box height 166mm

Shipping box width 240mm

Packaging unit 20pcs

Gross weight (Shipping box) 4.8kgs

Technical Drawings (mm)

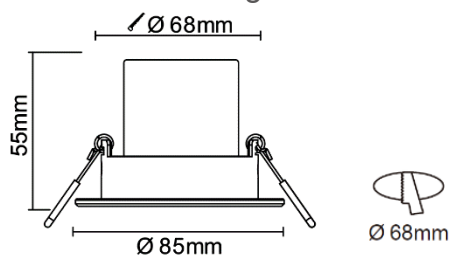

Package



85*55mm



105*105*68mm




550*20*166mm(20PCS)

Cautions:

- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult competent electricians for technical support
- If the supply cord is damaged, it shall be exclusively replaced by the manufacture or his service agent o similar qualified person in order to avoid a hazard

Installation /Mounting:

Please read the entire instruction manual before using the product and reserve it for future reference. We reserve the right for any error in text or image and any necessary change made to technical data. If you have any question regarding technical problems, please contact our Customer Services.

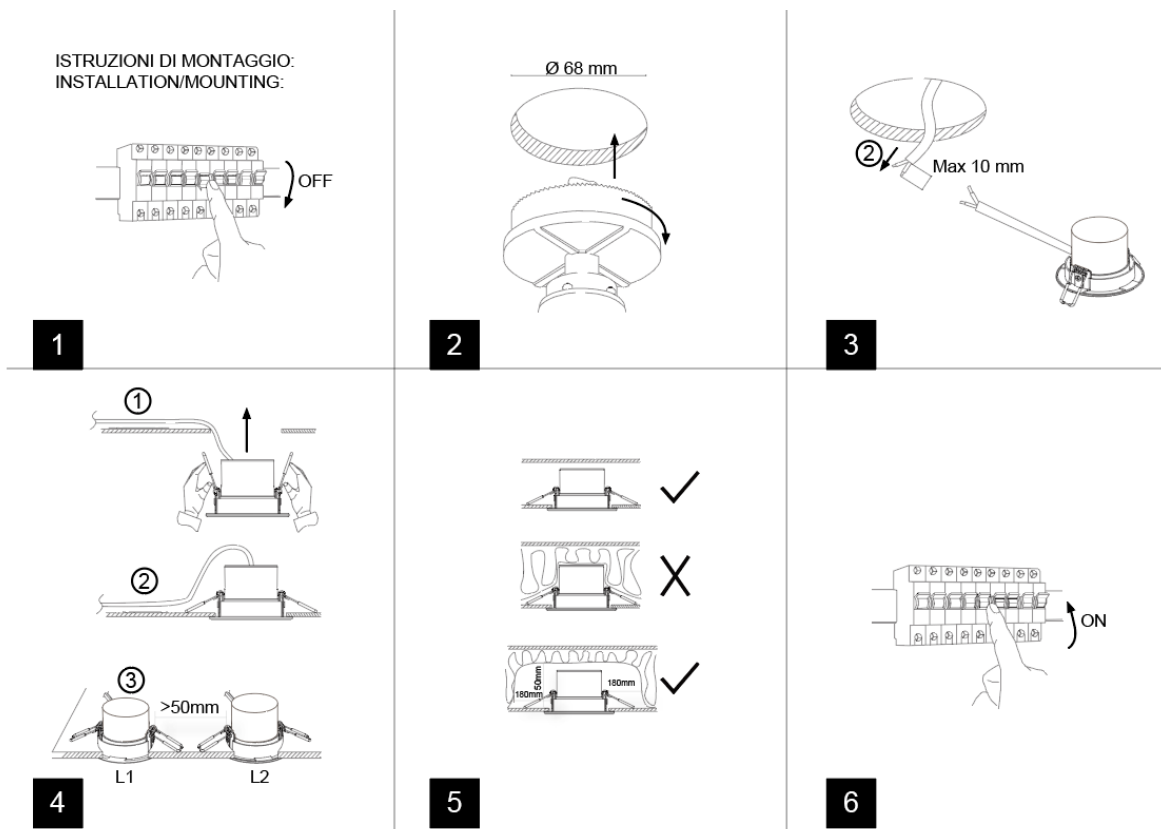

For non replacable lightsources. The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced"