

X-Line Apollo Single CCT 20W/m 2700K/3000K/4000K/6000K 24V CR180

Features



- 2700/3000/4000/5000/6000K, CR180
- High power 20W/m, high brightness 4000lm/m
- High efficiency 210lm/W
- 24VDC, high power efficiency
- For office ,industrial, architectural lighting
- Lifespan 40000 hrs,
- **5 years warranty**



Technical data

Electrical specifications			
Part No.		EAN	-
Wattage (W/m)	20	AC input voltage (V)	-
DC output voltage (V)	24	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications		CRI (Ra)	80
Colour temperature (CCT)	2700K 3000K 4000K 6000K	Luminous flux (lm/m)	3900 4000 4300 4000
Luminous efficiency (lm/W)	100(4000K)	Beam angle (°)	120°
Standard deviation of colour	3 SDCM		
UGR	-	Housing Colour	White/Black
Mechanical specifications		Length/ diameter (mm)	300/600/1000/1200
Housing material	FPC+Aluminum profile	Height (mm)	14
Optical cover/ lens material	-	Product weight	
Width/ diameter (mm)	18.3		
Cut length (mm)		L70/B50 service life at 25°C	40,000 hrs
Lifespan		L90/B10 service life at 25°C	20,000 hrs
Number of switching cycles	100,000		
L80/B10 service life at 25°C	25,000 hrs	Storage temperature range	-20~+70°C
Warranty period	5 Years		
Application parameters		Location of installation	-
Working temperature range	-20~+60°C	Protection type	IP20
Additional product specifications			
Type of installation	insertion and fixed		

Photometric Information

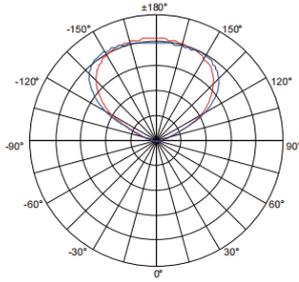


120°

Application



Linear for Industry

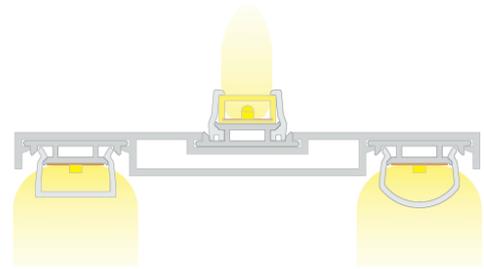

Architectural lighting

Caution


Power off before replacement

Do not be in violation of any fire regulations when using

Consult qualified electricians for technical support

If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard

Dimensions

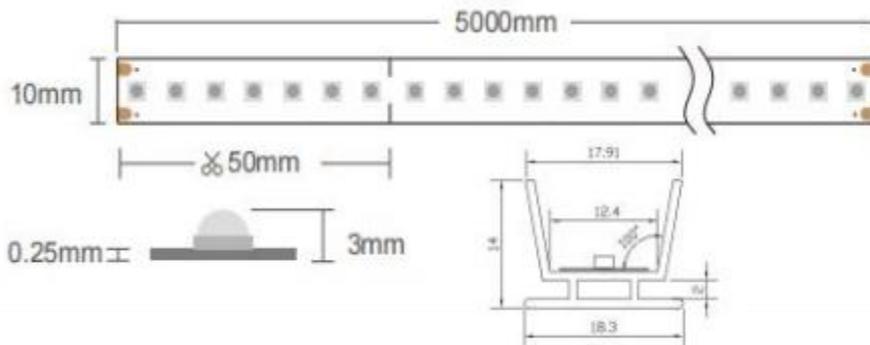

Accessories / Parts (Optional):



Aluminum slot Clamp



Plastic Cover



Apollo Flex Strip