

X-Line Apollo Single CCT 20W/m 2700K/3000K/4000K/6000K 24V CR95

Features



- 2700/3000/4000/5000/6000K, CRI95
- High power 20W/m, high brightness 3200lm/m
- High efficiency 160lm/W
- 24VDC, high power efficiency
- For office ,industrial, architectural lighting
- Lifespan 40000 hrs,
- **5 years warranty High energy efficiency**




Technical data

Electrical specifications			
Part No.		EAN	-
Wattage (W/m)	20	AC input voltage (V)	-
DC output voltage (V)	48	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications		CRI (Ra)	95
Colour temperature (CCT)	2700K 3000K 4000K 6000K	Luminous flux (lm/m)	2800 3000 3200 3000
Luminous efficiency (lm/W)	100(4000K)	Beam angle (°)	120°
Standard deviation of colour	3 SDCM		
UGR	-	Housing Colour	White/Black
Mechanical specifications		Length/ diameter (mm)	300/600/1000/1200
Housing material	FPC+Aluminum profile	Height (mm)	14
Optical cover/ lens material	-	Product weight	
Width/ diameter (mm)	18.3	L70/B50 service life at 25°C	40,000 hrs
Cut length (mm)		L90/B10 service life at 25°C	20,000 hrs
Lifespan			
Number of switching cycles	100,000	Storage temperature range	-20~+70°C
L80/B10 service life at 25°C	25,000 hrs		
Warranty period	5 Years	Location of installation	-
Application parameters		Protection type	IP20
Working temperature range	-20~+60°C		
Additional product specifications			

Photometric Information




114.4°



Application



Linear for Industry

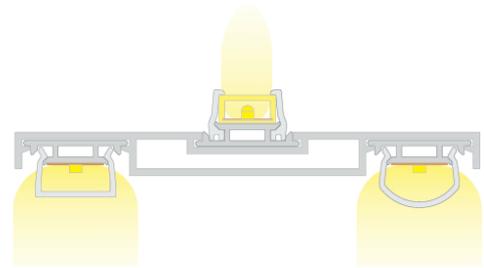

Architectural lighting

Caution


Power off before replacement

Do not be in violation of any fire regulations when using

Consult qualified electricians for technical support

If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard

Dimensions

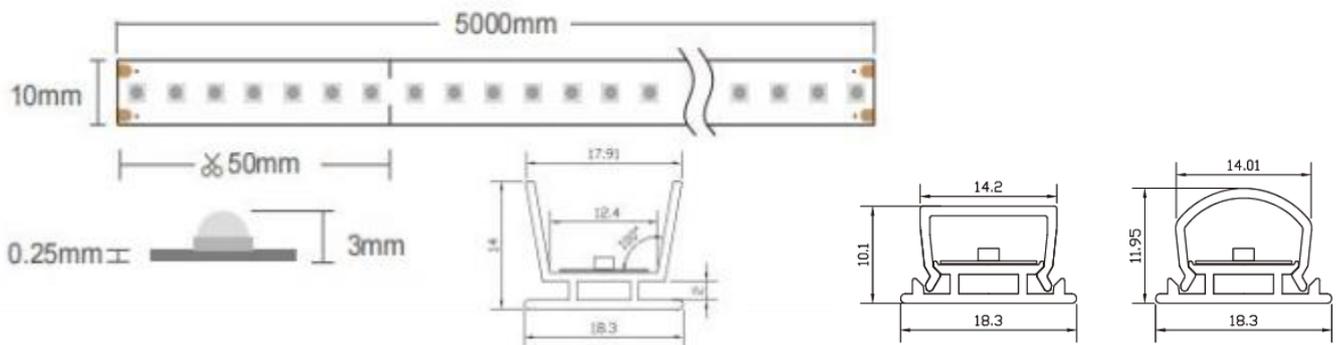

Accessories / Parts (Optional):



Aluminum slot Clamp



Plastic Cover



Apollo Flex Strip