

X-Line Apollo Single CCT 20W/m 2700K/3000K/4000K/6000K 48V CR95

Features




- 2700/3000/4000/5000/6000K, CRI95
- High power 30W/m, high brightness 4800lm/m
- High efficiency 160lm/W
- 48VDC, high power efficiency
- For office ,industrial, architectural lighting
- Lifespan 40000 hrs,
- **5 years warranty High energy efficiency**




Technical data

Electrical specifications			
Part No.		EAN	-
Wattage (W/m)	20	AC input voltage (V)	-
DC output voltage (V)	48	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications		CRI (Ra)	95
Colour temperature (CCT)	2700K 3000K 4000K 6000K	Luminous flux (lm/m)	4500 4600 4800 4600
Luminous efficiency (lm/W)	100(4000K)	Beam angle (°)	120°
Standard deviation of colour	3 SDCM		
UGR	-		
Mechanical specifications		Housing Colour	White/Black
Housing material	FPC+Aluminum profile	Length/ diameter (mm)	300/600/1000/1200
Optical cover/ lens material	-	Height (mm)	14
Width/ diameter (mm)	18.3	Product weight	
Cut length (mm)			
Lifespan		L70/B50 service life at 25°C	40,000 hrs
Number of switching cycles	100,000	L90/B10 service life at 25°C	20,000 hrs
L80/B10 service life at 25°C	25,000 hrs		
Warranty period	5 Years		
Application parameters		Storage temperature range	-20~+70°C
Working temperature range	-20~+60°C		
Additional product specifications		Location of installation	-
		Protection type	IP20


Photometric Information

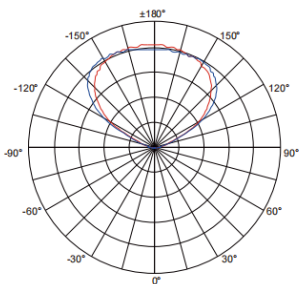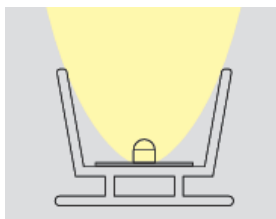


114.4°

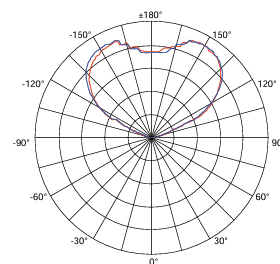

Application

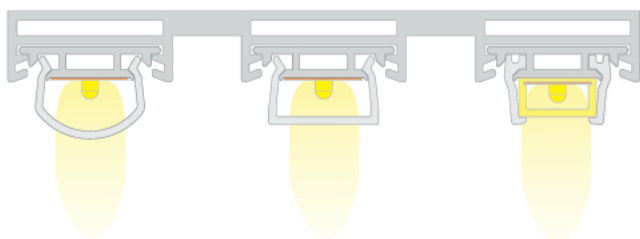

Linear for Industry

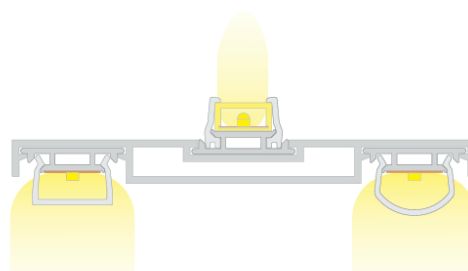

Architectural lighting

Caution


Power off before replacement

Do not be in violation of any fire regulations when using

Consult qualified electricians for technical support

If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard

Dimensions

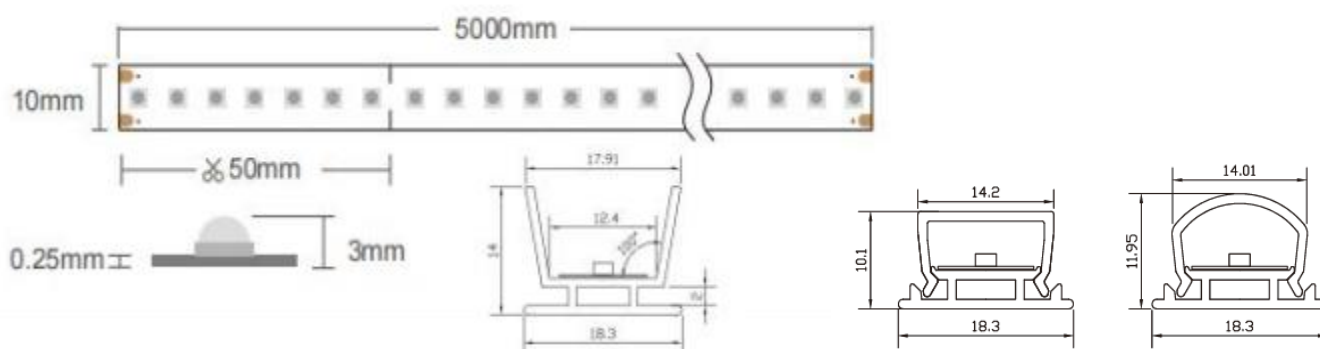

Accessories / Parts (Optional):



Aluminum slot Clamp



Plastic Cover



Apollo Flex Strip