

X-Line Artemi SUNWHITE IP65 20W/m 2100K~6000K 24V CRI90

**Features**

- 2100~6000K, CRI90
- IP65 ,water proof
- SUNWHITE Technology, HCL Lighting Module
- High power 20W/m, high brightness 2200lm/m
- 24VDC, high power efficiency
- For office ,industrial, architectural lighting
- Lifespan 40000 hrs,
- **5 years warranty**




**Technical data**

Electrical specifications			
Part No.		EAN	-
Wattage (W/m)	20	AC input voltage (V)	-
DC output voltage (V)	24	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications		CRI (Ra)	90
Colour temperature (CCT)	2100K 2700K 3000K 4000K 6000K	Luminous flux (lm/m)	1000 1300 1400 1500 1400
Luminous efficiency (lm/W)	100(4000K)	Beam angle (°)	120°
Standard deviation of colour	5 SDCM		
UGR	-		
Mechanical specifications		Housing Colour	White/Black
Housing material	FPC+Aluminum profile	Length/ diameter (mm)	300/600/1000/1200
Optical cover/ lens material	-	Height (mm)	14
Width/ diameter (mm)	18.3	Product weight	
Cut length (mm)			
Lifespan		L70/B50 service life at 25°C	40,000 hrs
Number of switching cycles	100,000	L90/B10 service life at 25°C	20,000 hrs
L80/B10 service life at 25°C	25,000 hrs		
Warranty period	5 Years		
Application parameters		Storage temperature range	-20~+70°C
Working temperature range	-20~+60°C	Location of installation	-
Additional product specifications		Protection type	IP20

Example: Artemi Silicone gel XLine Module




114.5°



### Application



Pendant lamp for Office/ Hotel

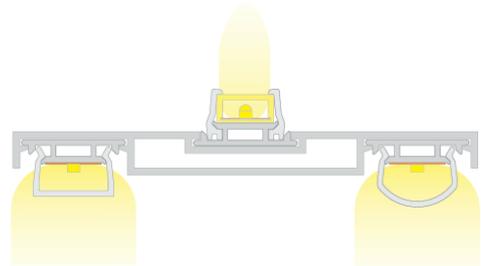

Architectural lighting

### Caution


**Power off before replacement**

**Do not be in violation of any fire regulations when using**

**Consult qualified electricians for technical support**

**If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard**

### Dimensions



### Accessories / Parts (Optional):



Aluminum slot Clamp



Plastic Cover