

X-Line Artemi SUNWHITE 20W/m 2100K~6000K 24/48V CRI90

**Features**


- 2100~6000K, CRI90
- SUNWHITE Technology, HCL Lighting Module
- High power 20W/m, high brightness 2200lm/m
- 24/48VDC, high power efficiency
- For office ,industrial, architectural lighting
- Lifespan 40000 hrs,
- **5 years warranty**





**Technical data**

Electrical specifications			
Part No.		EAN	-
Wattage (W/m)	20	AC input voltage (V)	-
DC output voltage (V)	24/48	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications		CRI (Ra)	90
Colour temperature (CCT)	2100K 2700K 3000K 4000K 6000K	Luminous flux (lm/m)	1500 1800 2000 2200 2000
Luminous efficiency (lm/W)	100(4000K)	Beam angle (°)	120°
Standard deviation of colour	5 SDCM		
UGR	-	Housing Colour	White/Black
Mechanical specifications		Length/ diameter (mm)	300/600/1000/1200
Housing material	FPC+Aluminum profile	Height (mm)	14
Optical cover/ lens material	-	Product weight	
Width/ diameter (mm)	18.3		
Cut length (mm)		L70/B50 service life at 25°C	40,000 hrs
Lifespan		L90/B10 service life at 25°C	20,000 hrs
Number of switching cycles	100,000		
L80/B10 service life at 25°C	25,000 hrs	Storage temperature range	-20~+70°C
Warranty period	5 Years		
Application parameters		Location of installation	-
Working temperature range	-20~+60°C	Protection type	IP20
Additional product specifications			


## Photometric Information



132.4°




128.9°



## Application



Pendant lamp for Office/ Hotel

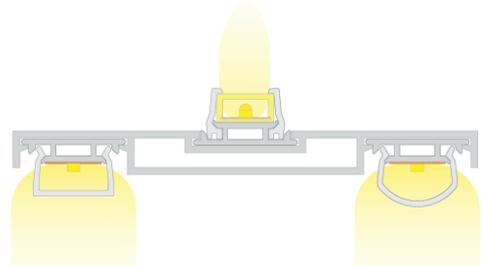

Architectural lighting

## Caution


**Power off before replacement**

**Do not be in violation of any fire regulations when using**

**Consult qualified electricians for technical support**

**If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard**

## Dimensions

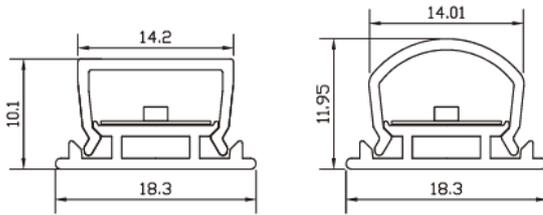

## Accessories / Parts (Optional):



Aluminum slot Clamp



Plastic Cover