

X-Line Artemi SUNWHITE 30W/m 2700K~6000K 24/48V CRI90

Features


- 2700~6000K, CRI90
- SUNWHITE Technology, HCL Lighting Module
- High power 30W/m, high brightness 2200lm/m
- 48VDC, high power efficiency
- For office ,industrial, architectural lighting
- Lifespan 40000 hrs,
- **5 years warranty**





Technical data

Electrical specifications			
Part No.		EAN	-
Wattage (W/m)	30	AC input voltage (V)	-
DC output voltage (V)	48	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications		CRI (Ra)	90
Colour temperature (CCT)	2700K 3000K 4000K 6000K	Luminous flux (lm/m)	2700 3000 3300 3000
Luminous efficiency (lm/W)	100(4000K)	Beam angle (°)	130/140°
Standard deviation of colour	5 SDCM		
UGR	-		
Mechanical specifications		Housing Colour	White/Black
Housing material	FPC+Aluminum profile	Length/ diameter (mm)	300/600/1000/1200
Optical cover/ lens material	-	Height (mm)	14
Width/ diameter (mm)	18.3	Product weight	
Cut length (mm)			
Lifespan		L70/B50 service life at 25°C	40,000 hrs
Number of switching cycles	100,000	L90/B10 service life at 25°C	20,000 hrs
L80/B10 service life at 25°C	25,000 hrs		
Warranty period	5 Years		
Application parameters		Storage temperature range	-20~+70°C
Working temperature range	-20~+60°C		
Additional product specifications		Location of installation	-
		Protection type	IP20


Photometric Information



132.4°




128.9°



Application



Pendant lamp for Office/ Hotel

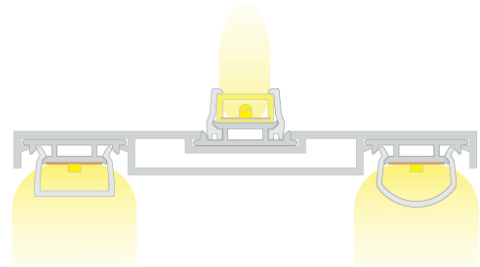

Architectural lighting

Caution



Power off before replacement

Do not be in violation of any fire regulations when using

Consult qualified electricians for technical support

If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard

Dimensions



Accessories / Parts (Optional):



Aluminum slot Clamp



Plastic Cover