

Classic HALED97 DTW GU10 6W 500lm CRI95 36° 2580K-2000K WGU10 KC75T6-28350**Features**

- The best LED Lamps to replace Halogen lamps
- HALED optical design with patent, comfortable light like halogen
- 6W only, equal to 80W halogen lamp(Follow new ErP)
- Dim to Warm by Traic Dimmer like Halogen
- High PF, Flicker free, Low UGR, CRI>95, R9>95
- Directional lighting source
- Replace traditional halogen lamps directly and easily
- Glass body, classic design
- Used for all kinds of non-enclosed lighting fixtures
- Lifespan 40000 hrs, 5years warranty



CE RoHS ErP

Applications:


- Commercial Lighting: Hotels, Restaurants, Theater, Bars, Cafes, Shop Etc., Museum.
- Home Lighting: Villa, Residential buildings, house.
- All non-enclosed Directional lighting fixtures.

Technical data

Part No.	WGU10 KC75T6-28350
Wattage (W)	6W
Voltage (V)	AC200V-240V
Frequency (Hz)	50/60Hz
Power factor	>0.75
Dimmable	Dim to Warm
Color temperature (CCT)	2580K~2000K
Lumens(lm)	500
CRI	95
Beam angle (°)	36°
Luminous intensity(cd)	1100cd
Life Span(hrs)	40000hrs
Working temperature range	-20~+50℃
Storage temperature range	-20~+70℃
Gift Box Dimensions (LxWxH)	50*50*65mm
Inner Carton Dimensions (LxWxH)	270*110*80mm (10PCS)
Shipping Carton Dimensions(LxWxH)	580*285*185mm (100PCS)


Classic HALED97 DTW GU10 6W 500lm CRI95 36° 2580K-2000K WGU10 KC75T6-28350

Beam Angle(deg) & Illuminance (cd & lx) Diagram

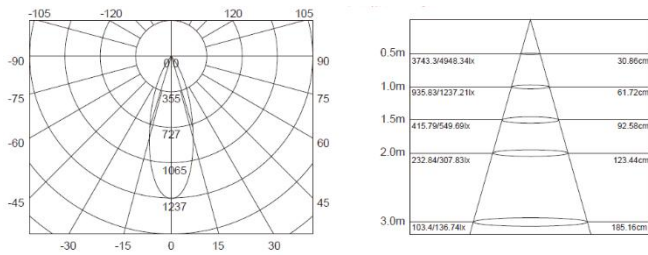

6W 500lm 2580K~2000K 36° / 1100cd


Technical Drawings (mm)



Package



Gift Box 50*50*65mm

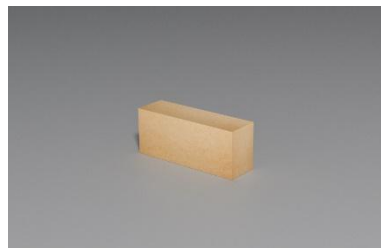

Inner Carton 270*110*80mm(10PCS)




Shipping Carton 580*285*185mm(100PCS)

Installation /Mounting:

Please read the entire instruction manual before using the product and reserve it for future reference. We reserve the right for any error in text or image and any necessary change made to technical data. If you have any question regarding technical problems, please contact our Customer Services.

Replacement

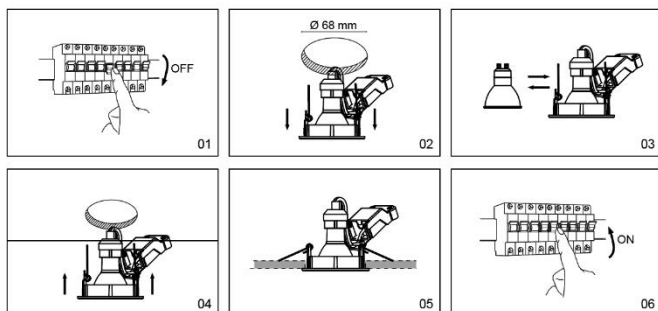

Cautions:

- Don't touch the lamp when it is lighted
- Don't use it in enclosed fixtures
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.